

## Tools and Materials

### Tools List

- Hand saw
- Power saw
- Keyhole saw
- Table saw (optional, for convenience)
- Hammer drill, cordless drill
- Rebar tie tool
- Hot knife, router
- Hammer
- Framing square
- Concrete tools
- Level, laser level
- Mason's line and chalk line
- Rebar bender and cutter
- Scaffold planks
- Wall alignment (bracing) system
- Concrete vibrator, 1" maximum
- Foam guns, foam, foam cleaner
- Work gloves
- Sun Screen
- Broom and floor scraper

### Material List

- Reinforcing as required plus accessories, (rebar ties, stirrups)
- Screws (1-5/8", 2-1/2", #10 Course thread), Concrete screws 1 3/4"
- VBuck window & door buck material
- Sleeves for mechanical, electrical, plumbing

### Recommended Concrete Mix

(See our website for mix designs.)

- **3000 psi:** Higher psi can be used but lower psi is *not* recommended. In Canada, minimum 20 mpa.
- **Aggregate:** 3/8" (10mm) rock chip or river rock is highly recommended. 1/2" (12mm) aggregate can be used but will require more vibration.
- **Slump:** 5" - 6" (Keep in mind as the concrete is being pumped under pressure, it loses approximately 1/2-inch of slump.)

## Steps for Accurate Estimating

1. Divide wall height by 16" and round up. This is the **number of courses** required.
2. Multiply the # of 90° corners in the structure by the # of courses. This is the **number of 90° corner forms** required.
3. Multiply the # of 45° corners in the structure by the # of courses. This is the **number of 45° corner forms** required.
4. Use the chart below to determine the **total square footage** of all **90° forms** to be used. (Number of 90° forms multiplied by sq. ft. per form.) Do the same for the **45° forms**.
5. Determine the **total square foot area of wall** being formed (width x height, minus 80% of window and door openings). Subtract total square foot of all 90° forms to be used and all 45° forms to be used.
6. Divide the remaining square footage of the wall by 5.33 to determine the **number of straight forms required**. Add a small number of forms for possible waste.
7. Estimate the **concrete volume** required by the following: Divide total square footage of wall to be formed, including corners, by 53 or 40 (for 6" or 8" forms, respectively). This equals the **number of cubic yards of concrete** required. Add 1.5 additional yardage for waste and the pump.

	Block Type	Area	Concrete Volume
4"	Straight*	5.33	.065844 cu. yd.
	90° Corner*	5.56	.054574 cu. yd.
	45° Corner*	4.89	.054985 cu. yd.
6"	Straight	5.33	.098765 cu. yd.
	90° Corner	6.00	.086528 cu. yd.
	45° Corner	4.89	.080841 cu. yd.
8"	Brick Ledge	5.33	.134148 cu. yd.
	Straight	5.33	.131687 cu. yd.
	90° Corner	6.44	.121517 cu. yd.
8"	45° Corner	4.89	.105425 cu. yd.
	Brick Ledge	5.33	.167074 cu. yd.

\*4" Product Line available Spring 2007.


## Prior to Pour Checklist

- Are walls straight, plumb, square and level?
- Are window and door openings located correctly? Are they plumb and square? Are they cross-braced sufficiently?
- Is reinforcing steel placed in accordance with local building requirements and/or Project Engineer?
- Is alignment (bracing) and scaffold system installed properly?
- Check all block cuts to make sure there are no loose connections that concrete might push out. Screw wood over any such locations to secure.
- Have all penetrations (electric, plumbing, HVAC, dryer vents) been accommodated?
- Is the concrete acceptable for the method of placement and engineering or code requirements? (See **Recommended Concrete Mix.**)
- Have anchor bolts and tie-down straps been located and marked, ready to install?
- Have all beam pockets been located and cut out?
- Is adequate labor prepared for pouring?
- Recommended min. pouring temperature is 15°F (-9°C). Properly handled, specially formulated concrete can be poured at temperatures as low as -15°F (-26°C). Consult your ready mix company. At temperatures below freezing, you must cover all exposed concrete with insulating material.

*This is a guide for the contractor or installer of BuildBlock Insulating Concrete Forms. It is intended to supplement the basic construction knowledge of the professional.*

*For the latest version of this publication and our complete **Installation & Technical Manual** go to [www.BuildBlock.com/technical.htm](http://www.BuildBlock.com/technical.htm)*

BUILDBLOCK REPRESENTATIVE:



Patent Pending U.S. & Foreign Countries

## Pocket Installation Guide

BuildBlock Building Systems, LLC

9701 N. Broadway Ext.  
Okla. City, OK 73114  
[www.buildblock.com](http://www.buildblock.com)


Phone: 405-840-3386  
Toll-Free: 866-222-2575  
Tech Support: 405-201-1490

Item# BBM-2100

Rev. 1/07

## Step 1 Footing or Slab

1. Footing or slab must be level for best results (within  $\frac{1}{4}$ " in all directions).
2. Establish wall locations on footing or slab with chalk line.
3. Place packaged forms inside perimeter of footing.
4. When pouring footing or slab, place reinforcing dowels as per Project Engineer and/or local building code requirements. The following dowel spacing instructions will prevent dowels from interfering with webs:
  - a.) **6" 90° Corner:** Place first dowel  $5\frac{1}{2}$ " in from one outside edge and  $8\frac{1}{2}$ " in from the other outside edge as shown in Diagram A. Reverse those measurements to place Dowel #2. Space remaining dowels on 6" increments according to your engineering requirements (i.e. 6, 12, 18, or 24" apart.)
  - b.) **8" 90° Corner:** Place first dowel  $6\frac{1}{2}$ " in from one outside edge and  $10\frac{1}{2}$ " in from the other outside edge as shown in Diagram B. Reverse those measurements to place Dowel #2. Then space remaining dowels on 6" increments as described above. **Note:** Optimum location of steel is centered between webs.

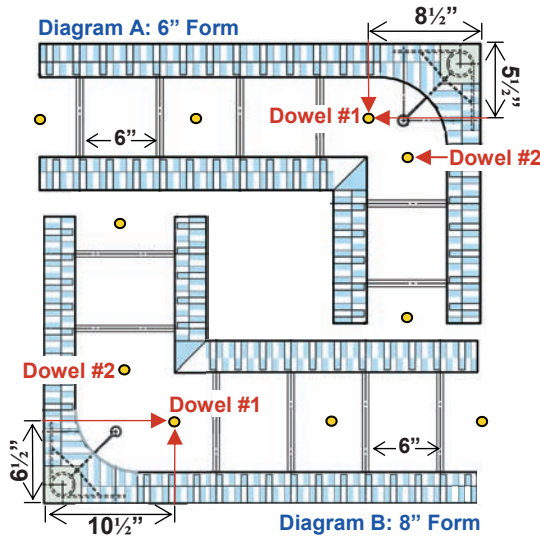

5. Where a step footing is required we recommend that the step be set at 16" increments to align with courses. If an 8" step is required, block may be cut in half horizontally.
6. Optional: Drop  $\frac{1}{2}$ " or  $\frac{5}{8}$ " rebar rod in circular hole of corner web for additional strength.

## Step 2 Coursing Placement

1. Prior to setting forms, determine the exact wall height required for the project. If the wall height required is not divisible by 16" then one or two courses may need to be cut horizontally. When determining cut, care must be taken to preserve all cross web members.

2. Set corner forms level and plumb. Set straight forms, starting from corners and moving toward center of wall. (Run first course of corners with long side in same direction. Reverse every other course in the opposite direction. This offsets courses and makes a one foot stagger.)
3. Try cutting blocks on vertical lines (center between two interlocks) in a manner that will not jeopardize the blocks functioning interlock. If it is not possible to adjust wall dimensions, a "stacked joint" will be created which should be placed under a window or at center of door to minimize its effect. If possible try to keep this cut four to six feet from a corner.
4. Note that horizontal rebar must be placed as the BuildBlock forms are stacked, per engineering requirements or design. (See Step 4.) Complete first course.

## Step 3

### Door and Window Openings


1. Determine openings for doors and windows: Mark footing or slab at these locations.
2. Have window and door bucks preassembled and corners braced. Please allow at least  $\frac{1}{2}$ " over sizing of bucks in both directions to allow placement of windows plumb and level at later time. Have height locations determined for setting of bucks. If needed, cut block horizontally for setting bucks between block courses. (Bucks may be built out of VBuck or dimensional lumber. VBuck is highly recommended.)
3. Set door bucks in position. Temporarily brace, plumb and level.
4. When stacking forms around window and door VBucks, leave  $\frac{3}{8}$ " space between VBuck and forms. This allows for adjustment before pouring concrete if out of plumb. (Not required for dimensional lumber bucks.)



## Step 4

### Reinforcing Steel

1. Create  $1\frac{1}{4}$ " length rebar collars out of  $1\frac{1}{4}$ " PVC pipe with Skill saw. Before stacking second course, place collars over vertical dowels protruding from footing or slab. NOTE: Some code officials do not allow these collars. Check local codes first.
2. Snap horizontal rebar into the web fingers of the first course, alternating rebar courses left and right of center. Every other rebar course is placed in the same rebar finger positions.
3. Continue to stagger in this manner. By staggering horizontal rebar, it will hold the vertical bar, once placed, between the horizontal bars.
4. Once entire wall is stacked, thread vertical rebar



- between horizontal rebar and place end into PVC collar. Tie vertical rebar to top horizontal rebar. (Note: Vertical rebar must be  $1"-1\frac{1}{2}"$  shorter than top of wall. This steel can be pre-ordered to length.)
5. Refer to engineering for all header/lintel steel placement and stirrup requirements.

## Step 5 Successive Courses


1. Start second course by reversing direction of corner form, creating a stagger of the vertical joints. Proceed around perimeter in the same manner as the first course. Make sure blocks are pressed together completely.
2. Once the first three courses have been set, string walls and shim.
3. For out-of-level footings or slabs, use wood door shims to level low areas and trim bottom of block for high areas.
4. Set all courses the same way as the first and second. Cut forms at window openings. Place reinforcement as required.
5. Glue down final (top) course of blocks 6" from each end.
6. Identify all building service penetrations and install appropriate size pipes.
7. Once wall is completely stacked, pop string line at desired wall height and trim top of wall level.

## Step 6

### Wall Bracing

Install wall alignment (bracing) system in the following manner after the third or fourth course is completed:

1. **Regular Corners:** Start 2 feet from inside regular corner going one direction and 3 feet going the opposite direction. This keeps braces from interfering with each other (see diagram below).
- Inverse Corners:** Start 4 inches from inverse corners (see diagram). Attach braces to BuildBlock corner tie.

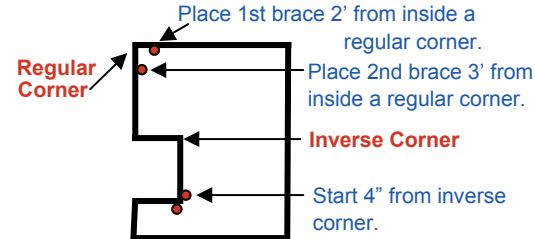

2. Thereafter, place an alignment unit every 5 feet.
3. At every other course, fasten bracing to wall at "BB" attach points.
4. Braces should have at least one-inch vertical slots for screw attachments. Place screws at top of the vertical slots. To prevent bowing from wall compression, do not over tighten screws when attaching braces.
5. **Proper installation of bracing system is critical to wall alignment as well as crew safety.** We advise contacting a BuildBlock distributor for support.

## Step 7

### Concrete Placement

1. Use **Prior to Pour checklist** (see back).
2. Order/use **proper concrete mix** (see back).
3. When ordering Pump Truck, make sure they have an "S" bend, ram's horn, or reducer before end of hose. If possible, final size of hose should be reduced to 3".
4. Begin pouring 4' to 5' from a corner; direct concrete flow towards the corner, then move along the wall. Never pour directly down a corner.
5. When filling around window and door bucks alternate pour



from side to side so buck is not moved sideways by concrete pressure.

6. As the pour continues, make sure that the space below the bottom of any window opening or pipe sleeve is filled entirely and vibrated.
7. Proper consolidation of concrete can be accomplished by hand rodding, external vibration, or internal vibration (1" pencil vibrator recommended). Vibrate all bucks completely with external tapping especially near top corners of bucks.
8. Concrete should be placed with a constant, moderate and steady flow, using two or three passes for pour heights eight to ten feet.
9. Final alignment of each wall must be performed before the concrete has set.
10. After finishing concrete top, place anchor bolts or plate straps into wet concrete.
11. All walls, bucks, and floors should be brushed and swept clean before concrete hardens. Recheck wall alignment before leaving jobsite.



Do not remove vertical bracing on walls for at least 48-96 hours. All vertical window and door header bracing must remain for a minimum of seven days.

## Finishing the Job

### Vapor Barriers and Waterproofing

Proper installation of waterproofing (below grade) and vapor barriers (above grade) **according to your local code requirements** is vital to the success of your project. In regions of heavy termite infestation, EPS insulation must be protected by code approved materials or methods. Then your wall can be clad with the exterior finish of your choice, such as EIFS, brick, rock, or siding.

For more information, see our **Installation & Technical Manual** or your BuildBlock Distributor.

